



The
Patent
Office

PCT/GB 97 / 01176

The Patent Office

Cardiff Road

Newport

Gwent

NP9

REC D 02 JUN 1997

WPO PCT

PRIORITY DOCUMENT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation and Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed *Ansower*.

Dated *15th May, 1997*

Patents Act 1977

(Ru)

Patent
Office

THE PATENT OFFICE

A

17 MAY 1996

RECEIVED BY FAX

20MAY96 E194851-1 002338

201/7700 25.00

The Patent Office

Cardiff Road

Newport

Gwent NP9 1RH

Request for grant of a patent*(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)*

1. Your reference

BKCD/EGM/TBS.39

2. Patent application number

*(The Patent Office will fill in this part)***9610441.9**

17 MAY 1996

3. Full name, address and postcode of the or of each applicant *(underline all surnames)*TBS Engineering Limited
Longhill
Elmstone Hardwicke
Cheltenham
Gloucestershire GL51 9TYPatents ADP number *(if you know it)*

If the applicant is a corporate body, give the country/state of its incorporation

United Kingdom

5665773CC1

4. Title of the invention

"Loading Apparatus"

5. Name of your agent *(if you have one)*"Address for service" in the United Kingdom to which all correspondence should be sent *(including the postcode)*Wynne-Jones, Laine & James
22 Rodney Road
Cheltenham
Gloucestershire GL50 1JJPatents ADP number *(if you know it)*

1792001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and *(if you know it)* the or each application number

Country

Priority application number
*(if you know it)*Date of filing
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
*(day / month / year)*8. Is a statement of inventorship and of right to grant of a patent required in support of this request? *(Answer 'Yes' if:*

- a) any applicant named in part 3 is not an inventor, or
- b) there is an inventor who is not named as an applicant, or
- c) any named applicant is a corporate body.

See note (d))

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description 11

Claim(s)

Abstract

Drawing(s) 5

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77)

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature

Date

Wynne-Jones, Laine & James 17.5.96

12. Name and daytime telephone number of person to contact in the United Kingdom

Mr. Dunlop
01242-515807

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

Loading Apparatus

This invention relates to apparatus for loading battery plate groups into a battery box and, in particular, but not exclusively to loading groups for recombination batteries.

5 Recombination batteries (i.e. batteries in which the hydrogen and oxygen recombine to form water) tend to have separators of microporous glass fibre in which the acid electrolyte is fully absorbed. The separator material is extremely delicate and the group has to be loaded into the
10 battery box in a compressed state (and retained in that state by the box) in order to ensure that the electrolyte is in active contact with the plates.

It will readily be appreciated that there are significant difficulties in inserting the compressed group
15 into the battery box cell when that cell is substantially the same size without damaging the separators.

There are also problems in transferring such groups from the processing jig boxes, because the walls in the jig boxes which apply the compression can mark the separators if
20 they do not act over the full separator surface. Accordingly attempts have been made to load the groups directly from the jig box by providing guides on the ends of the jig box walls. However, these guides can only extend partially across the width of the battery cell, because space must be
25 allowed for the transverse supports on which the group elements sit when the jig box is being loaded. The result is that the unguided portions of the groups snag on the box wall.

Conveniently, in either case, the stop means locates the group against downward movement and lateral movement

relative to the mid-plane of the group. In any of these cases, the stop means should be removable from the spaces. Thus, for example, the stop means may provide orthogonal abutments and may be rotatable about an axis adjacent to the intersection of the abutments so that the stop means can be
 5 rotated into and out of the space. The stop means may also be moveable with or in relation to the walls to maintain their relative location vis-à-vis the walls.

The distance between the group bottom edge location
 10 defined by the stop means and the top of its associated walls is preferably greater than the total height of the groups. This prevents any part of the group becoming snagged on the edges of the walls during insertion from the frame.

From yet another aspect the invention consists in
 15 battery group loading apparatus including a frame as defined above and further comprising means for loading groups into respective spaces in the frame to sit on the respective stop means, means for moving the walls towards each other to grip the groups between the walls, means for removing the stop
 20 means from the spaces, means for engaging a battery box with the guide means and means for pushing the groups through the guide means into the box.

Preferably the means for moving the walls towards each other are designed to exert compressive forces on the
 25 groups, in which case this force can be maintained during the operation of the pushing means.

The pushing means may act simultaneously on all the groups and may have heads, each of which may be formed with

formations to cooperate with the terminal posts or straps cast on the groups so as to achieve precise location between the head and the group.

From another aspect the invention includes apparatus
5 for unloading a battery group from the jig box including support means for engaging the bottom of a group on a support, whilst the group is held in a jig box, means for releasing the groups within the jig box, means for raising the support to a level at which a substantial portion of a
10 supported group would stand clear of the jig box and means for gripping the raised group. The support may include lateral abutments for preventing sideways movements of the group during raising.

From a further aspect the invention consists in
15 apparatus for unloading groups with cast on straps from a jig box and for loading those groups into a battery box comprising the apparatus for unloading as defined above and the battery group loading apparatus as defined above.

From a still further aspect the invention consists in
20 a method of unloading a battery group from a jig box including engaging the bottom of a group on a support, releasing the grip of the jig box on the group, raising the support and hence the group until a substantial portion of the group is clear of the jig box and gripping the raised
25 group.

The advantage of this method and the associated apparatus defined above, is that, in contrast to existing gripping arrangements (where the groups are gripped through

openings in the jig box, whilst the groups are still in the box) is that both the jig box and the gripping means may be provided with gripping surfaces which are continuous over the whole portion which engages the group. This prevents
5 damage and marking of the outside separators.

Although the invention has been defined above, it is to be understood that it includes any inventive combination of the features set out above or in the following description.

The invention may be performed in various ways and a
10 specific embodiment will now be described, by way of example, with the reference to the accompanying drawings, in which:

Figure 1 is a view from above of a recombination battery with its lid removed;

15 Figure 2 is a vertical section through an end cell of Figure 1 showing the group in situ;

Figure 3 is a part schematic view of an unloading station of a machine for casting straps on battery groups;

Figure 4 is a diagrammatic representation of the
20 removal of groups from the jig box of the machine of Figure 3;

Figure 5 is a diagrammatic representation of a loading configuration and illustrates in descending order a gripper holding groups, a compression frame and a battery box on a
25 conveyor;

Figure 6 is a view from above on the compression frame of Figure 5;

Figure 7 is a schematic partial side view of part of

the frame of Figure 6; and

Figure 8 is a edge view of a stuffing tool for pushing the groups from the frame of Figure 7 into a battery box.

As has been mentioned previously recombination
5 batteries require that the battery groups of plates and separators are inserted into the cells of a battery box under compression and that that compression is maintained by the walls of the battery box cells.

Figure 1 illustrates a battery box 10 have cells 11 in
10 which groups 12 have been inserted. The groups 12 comprise interleaved separators 13 and plates 14. The plates 14 have lugs 15 onto which straps 16 or terminal posts 17 have been cast by a machine for casting on such straps.

Whilst such machines can take a number of forms, they
15 now typically comprise a rotatable table which can support jig boxes in a series of circumferentially spaced locations. Each jig box comprises a number of spaces or cells into which groups can be loaded at a loading station and the jig boxes have walls which can be moved towards and away from
20 each other to group and release the groups. As the table indexed around the groups pass through stations in which they are aligned, the lugs cleaned and fluxed, and have straps and terminal posts cast on them so that by the time a jig box arrives at an unloading station it contains, in
25 the correct order and alignment, a set of groups 12 ready for loading into a battery box. The Applicants sell examples of such machines under the Trade Marks COS5 and COS8.

Such an unloading station is illustrated in Figure 3

The removed groups 12 can then be transported laterally by the heads 26 until they overlies a compression frame, which is generally indicated at 28, as can be seen in Figure 5. The compression frame 28 is more fully illustrated in
 5 Figures 6 and 7 and includes two end pieces 29, 30, which are interconnected, at each side, by pairs of vertically spaced horizontal rods 31-34. Walls 35 are slidably mounted on the upper rods 31-32, whilst stops 36 are rotatably and slidably mounted on the lower rods 33-34; there being a pair
 10 of opposed stops 36 for each group space 37 defined between a pair a of adjacent walls 35. The walls 35 and stops 36 are interlinked by respective chains 38,39 so that when an end stop and wall combination 40 is pulled away from its adjacent wall, the other walls and stops are pulled apart
 15 equally to spacing defined by the lengths of the chains. This movement is obtained by cylinder 60, which can also move in the opposite direction to compress the walls 35 together to spacings defined by spacers 41. These two positions constitute the open and closed positions of the
 20 frame 28.

As can be seen in Figure 5 each stop 36 comprises a generally rectangular body 42, which is slidably and rotatably mounted on a respective rod 33,34, and a projecting foot 43 for supporting the bottom of a group 12.
 25 The inward ends 44 of the bodies 42 define lateral abutments for the groups 12 so that they cannot move in a sideways direction. The bodies 42 on each side are interlinked as a set by respective rods 45, which can be used to rotate the

stops 36 from their support position, which is shown in Figure 5 to a generally vertical position in which they completely disengage the groups 12.

Each wall 35 carries one or more guide shims, which are
 5 designed to project into associated cells 11 of the battery box so that they define a guide surface for the groups to be slid along as they move into the respective cells 11. The shims 46 are formed continuously with their associated walls 35 so that there are no edges or projections which can
 10 damage the groups. Preferably the walls 21 and their shims 46 are formed from a single piece of highly polished flexible metal. The height of the walls from the location defined by the feet 43 is greater than the height of the groups, so that, once inserted, the groups cannot catch on
 15 any part of the wall and the width of the walls is greater than the width of the groups.

At the lower end of the frame 28 is mounted a rectangular guide frame 47, which receives and locates the frame 28 relative to a battery box 10 carried on a conveyor
 20 49. The guide frame 47 has a tapered open mouth 49 so that the box 10 is not damaged, when the frame 47 is engaged on it and equally the groups do not snag on the box 10 during insertion.

Returning to Figure 5, the groups 12 held in the
 25 gripping heads 26 are loaded into respective spaces between pair of walls 35, when the walls are in their "open" position. In this position the stops are arranged as shown in Figure 5 and so the groups are supported within their

respective spaces by pairs of feet 43 and are laterally located by ends 44. The walls 35 are then drawn together by cylinder 60 until they both grip and compress the groups 12. (Adjustable stops 40a define the limit of compression and
5 may be provided in addition to or instead of stops 41. Their advantage is that they allow easy adjustment for different battery size. Stops 41 are in any case used for 'dry' running the machine.) The frame 28 is then lowered downwardly onto a battery box 10 which has been brought to
10 the correct position by a conveyor 50 and the exact relative position between the battery box 10 and the frame 28 is defined by the guide frame 47. At this time the stops 36 can be swung out so that the groups can then be pushed downwardly, whilst still under compression into the cells
15 11. Because the walls 35 and shims 46 provide a continuous surface this is achieved simply, swiftly and without damage.



This pushing steps is achieved by a pusher (or stuffer) which is generally indicated at 51 in Figure 8. The pusher comprises a number of laterally spaced vertically dependent
20 rods 52 each of which carries a head 53 at its free end. The upper ends of the rods 52 are located on a plate 54, which can be raised and lowered by a cylinder 55. The heads 53 are profiled so that they precisely receive the upper surface of the group, the exact shape being determined by whether the
25 engaged group includes end terminals or simply straps. This profiling not only protects the group, but ensures very precise alignment between the heads 53 and the groups 12. Once the heads 53 have been engaged on the tops of the

groups 12, the cylinder 55 moves the pusher 51 downwards and the groups are pushed straight into the cells 11.

It will be understood that the whole arrangement of the frame 28 and the pusher 51 enables very precise relative
5 location of the pusher 51, the groups 12 and the battery box 10 and so the insertion happens extremely smoothly, despite the very tight fit which is necessary in a recombination battery.

Although the invention has been described very much in
10 the context of recombination batteries, the ability to load a series of adjacent cells simultaneously, is also attractive in the manufacture of other types of battery and the general principles outlined in the above specification may be equally applicable.

15 The precise construction shown in the drawings is advantageous, but the invention incorporates many variations. For example the stops could be slid in and out of the spaces, in which case a pair of stops could be constituted by a single element. Equally a single stop
20 element might be swung up from one side.

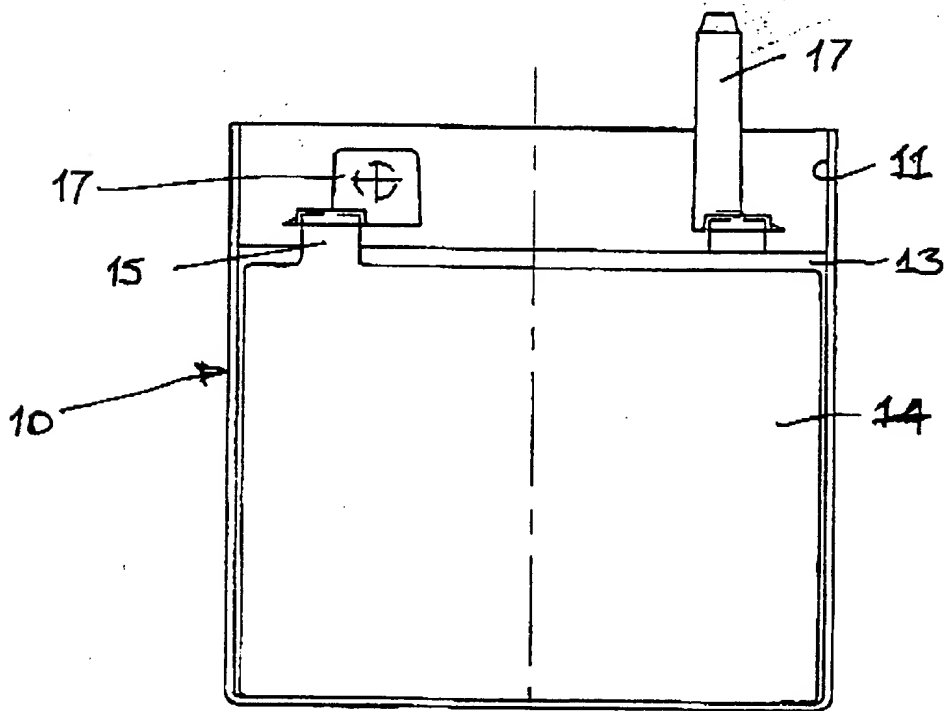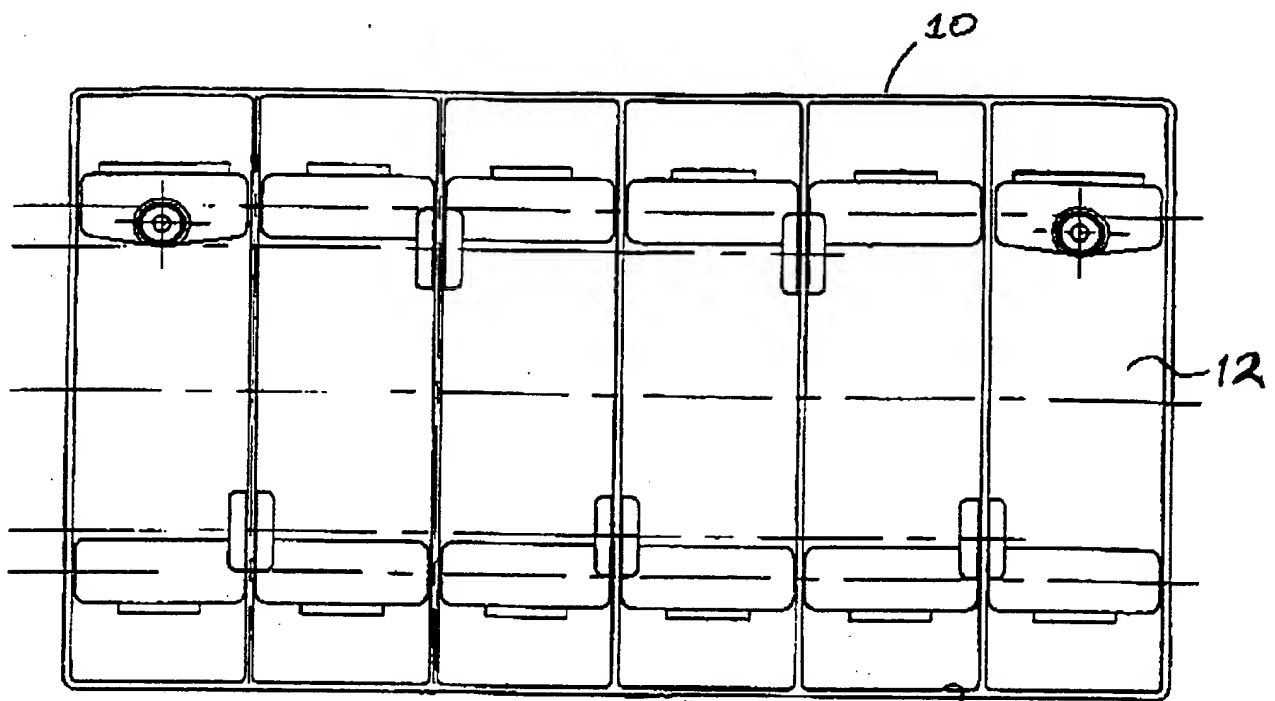

2/5



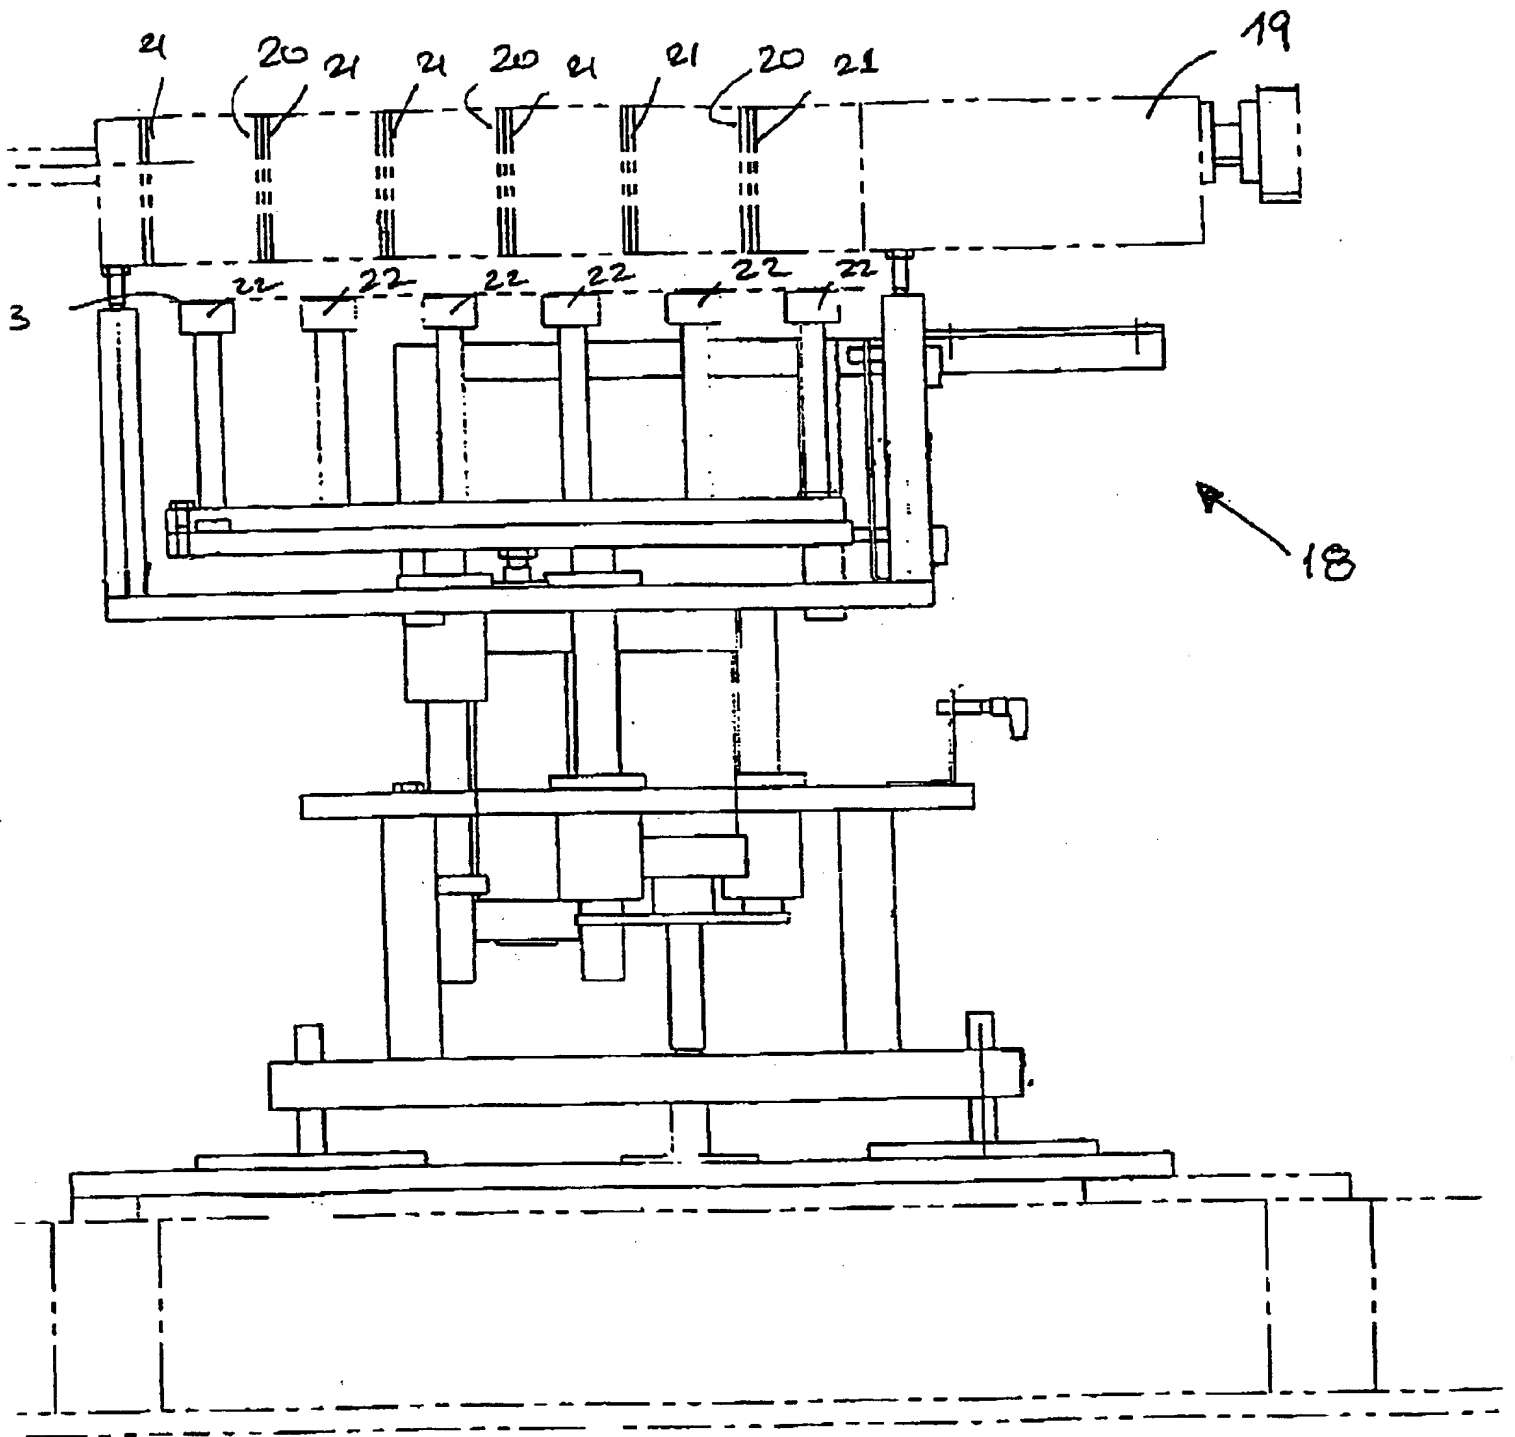


FIG 3.

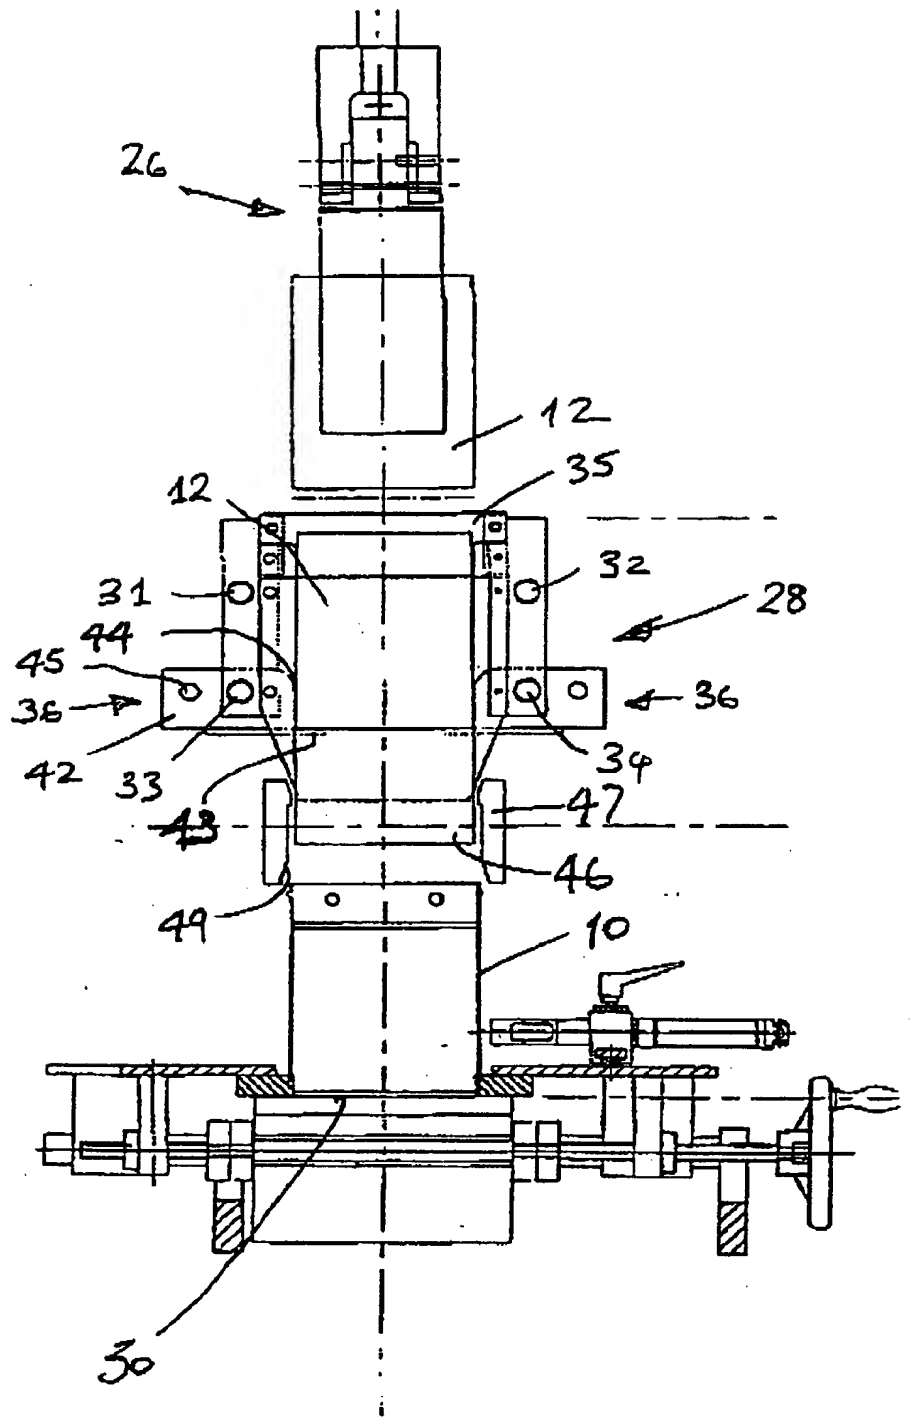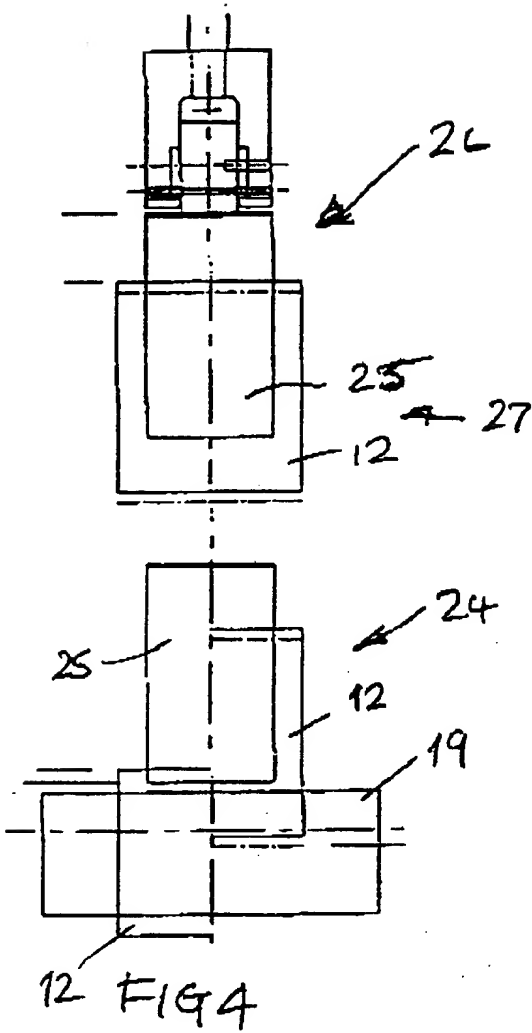

4/5

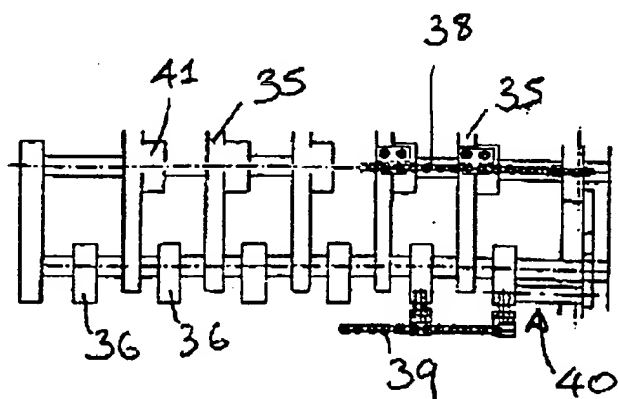
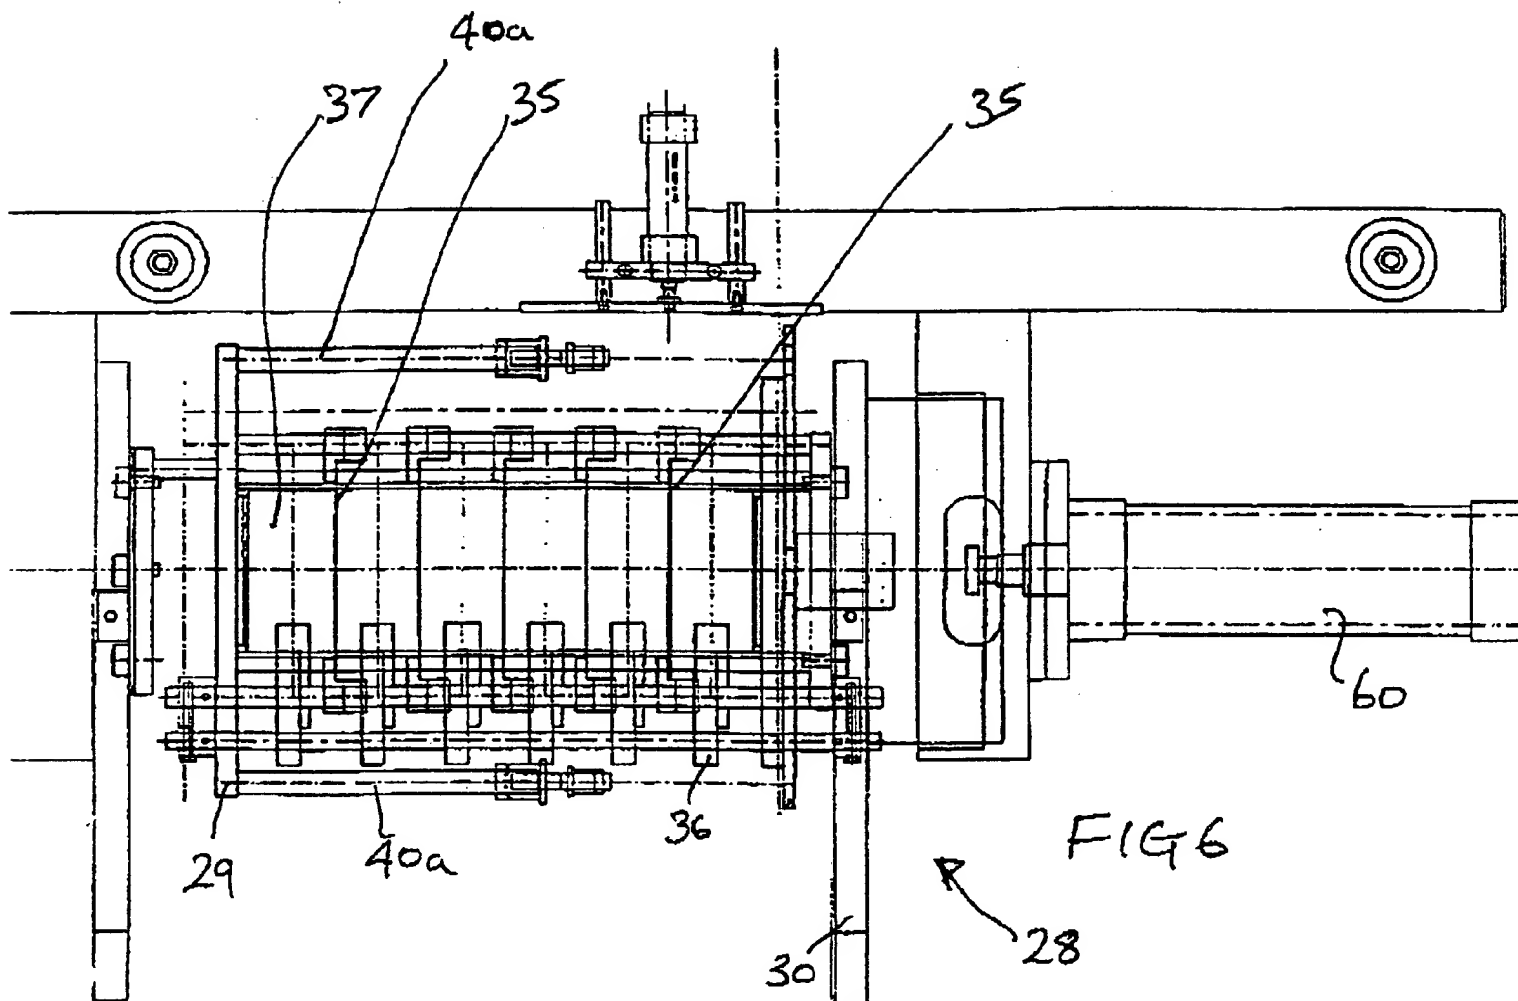


FIG 7

5/5

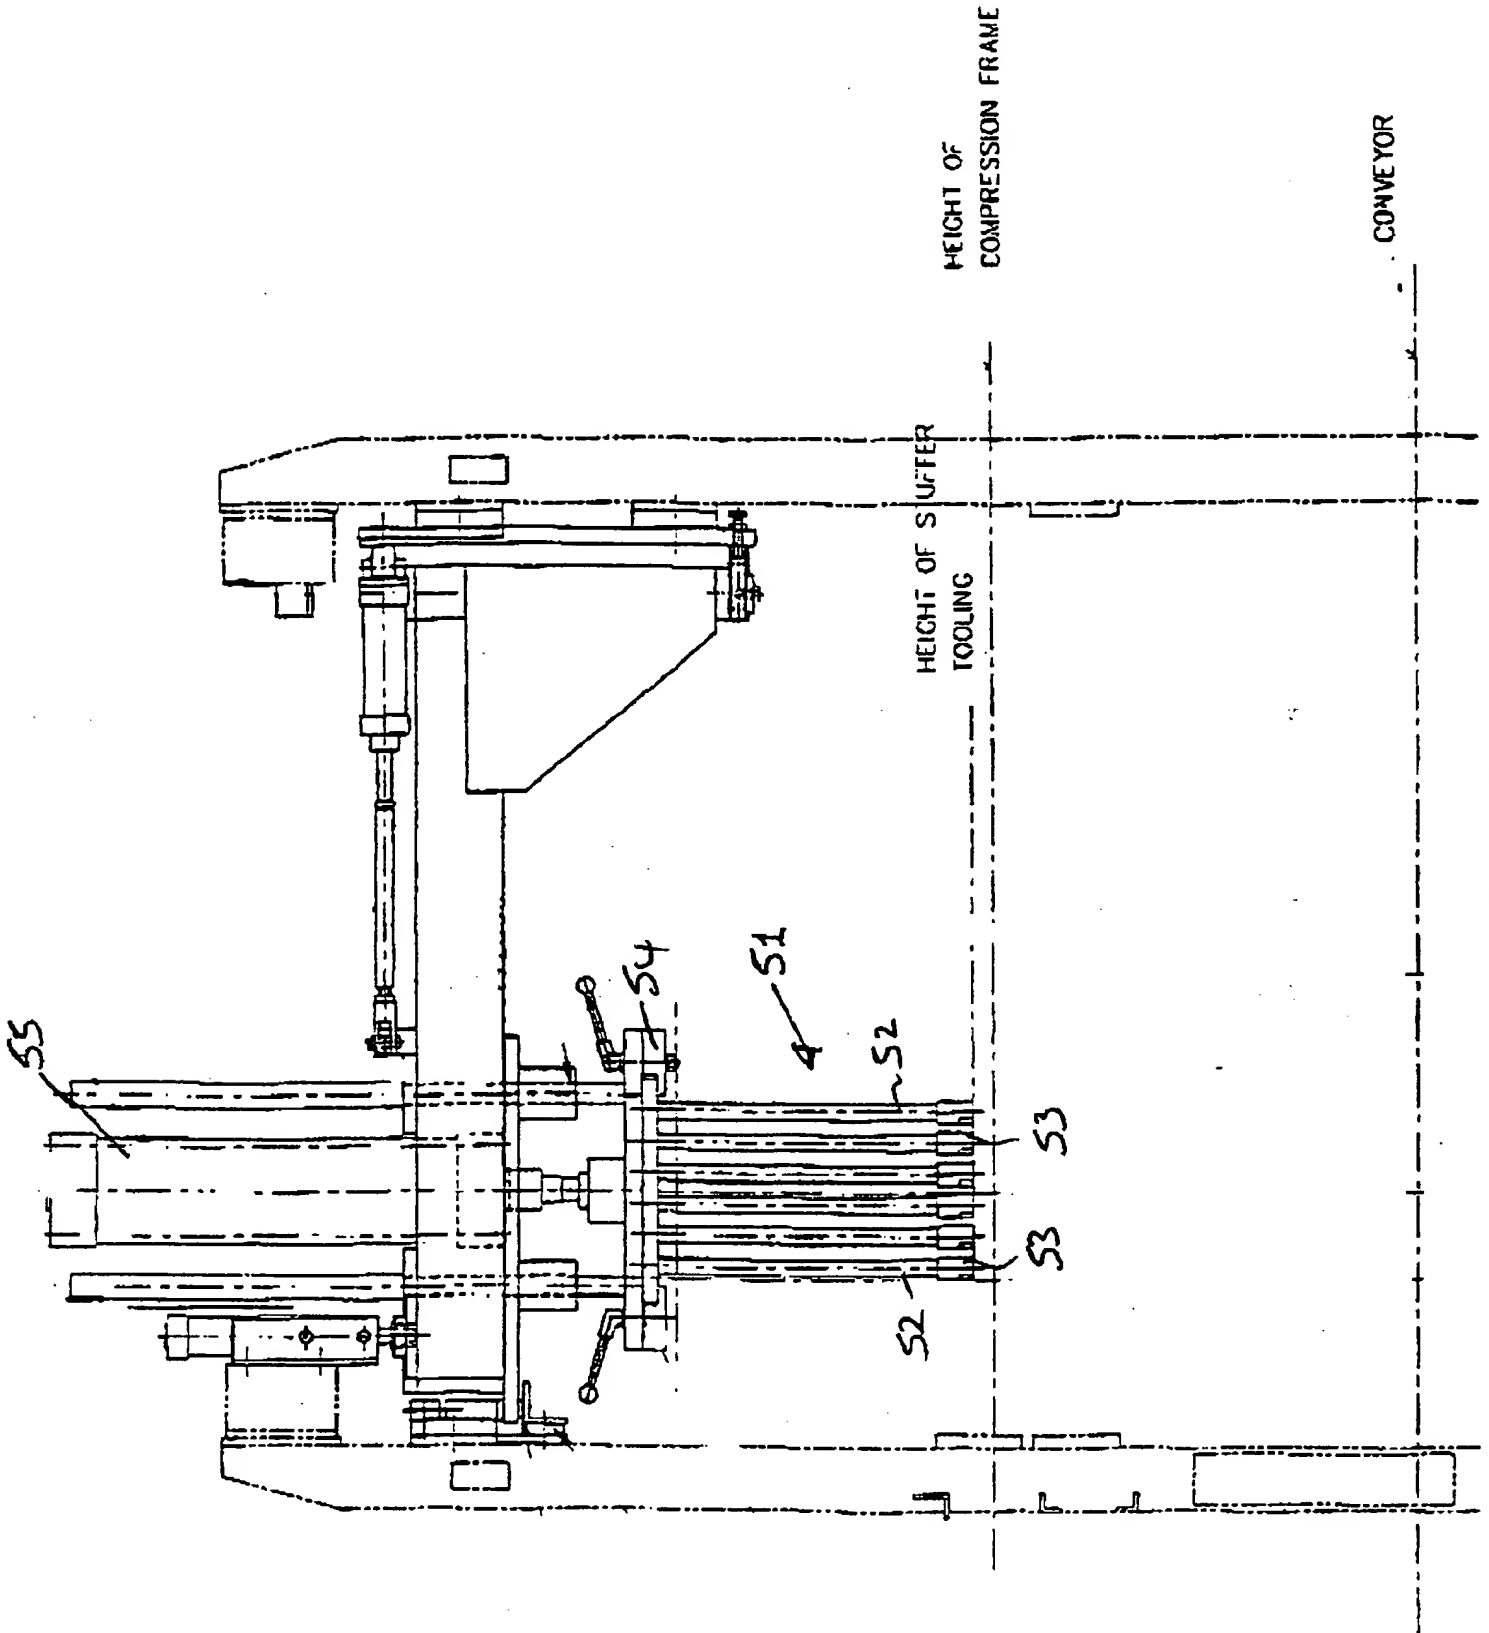


FIG 2

This Page Blank (uspto)